




Ensures your work complies

**TOUGH
AND
DURABLE**



Polilag is a closed-cell, non-absorbent lagging that lets pipes move freely through concrete, meeting AS3500 Part 2 Clause 3.8.2b standards.

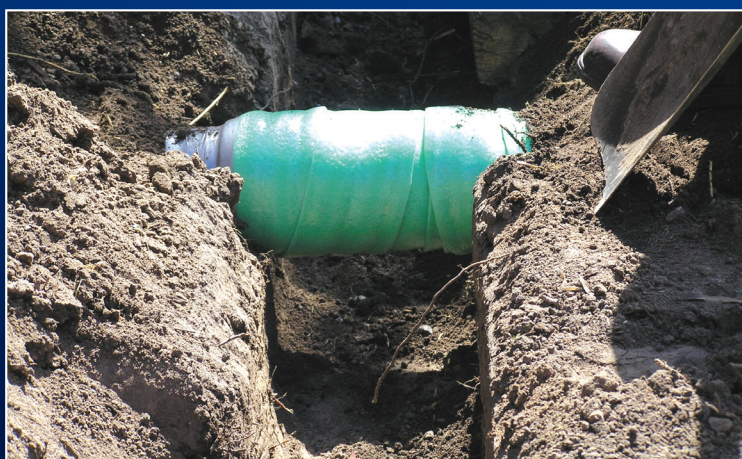

- Approved drain lagging
- Complies with AS2870 slab & footings
- Prevents pipe/concrete damage
- Non-absorbent
- Compression resistant
- Allows essential pipe movement
- Tough & durable
- Easy to use on all pipe sizes
- 6mm thick, 10m roll
- Saves installation time

Code: PLAG